




APPLIED ENERGY COMPANY LLC



Advanced Fluid Management Specialists

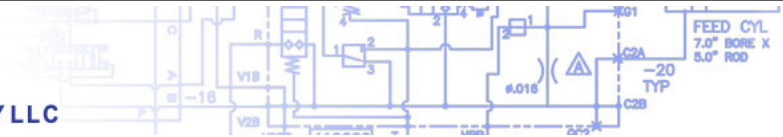

DH75 SERIES
Dirt Hog® ANTI-CORROSION SPIN-ON
WITH PALL MEDIA

- FLOWS 90 GPM
- TYPICAL BURST PRESSURE
- ELEMENT COLLAPSE PRESSURE
- TEMPERATURE RANGE
- AVAILABLE PORTS
- BYPASS VALVE
- INDICATORS
- PRESSURES TO 200 PSI
- 290 PSI (GASKET EXTRUSION)
- 100 PSID
- 140° MAX. IN HWCF OR WATER-GLYCOL
- SAE-24, NPT-16
- 50 PSID OR NON-BYPASS
- SS VISUAL OR ELECTRICAL SWITCH

OFFSHORE AND SUBSEA BRANCH

9421 FM 2920, BLDG. 21, TOMBALL, TX, USA 77375 · Phone: 01+(281) 351-2396 · Fax: 01+(281) 351-2670
www.appliedenergyco.com